

LED RGBW Ribbon



FEATURES

- 24 Volt
- 2oz. copper PCB options
- Cutting increments for custom lengths
- Available indoor/outdoor ratings
- 3M double sided tape on back
- Can be cut every 100mm

APPLICATIONS

- Cove, Valence, & Halo Lighting
- Path and contour marking
- Backlight or edge lighting for signage
- Architectural lights for canopies, corridors, windows, archways


CONNECTORS




SPECIFICATIONS

	5 meter (16ft) roll	10 meter (32ft) roll
Input Voltage	24V	
Power	12W / meter	
Power Requirements	60W	120W
IP Rating	IP64	
Dimming	Dimmable	
LED	Epistar	
CRI	Ra > 80	
Cutting	Cuttable Every 16.5cm (6.5 inches)	
Installation	3M Double Sided Tape, Aluminium Track	
Certification	cETLus	

RGB DIMENSIONS

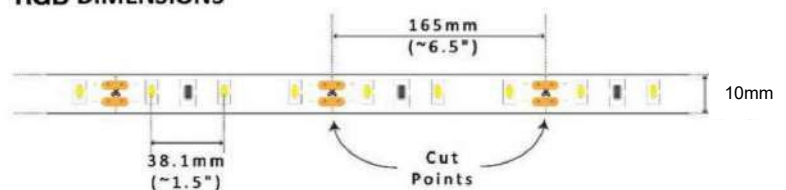

RGBW DIMENSIONS

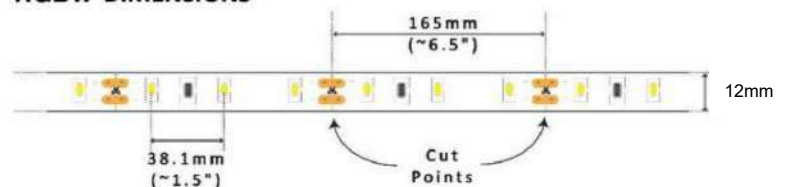

Model	Color	White Options	Length (m)	LED/M	LED Type	Copper Oz.	Beam Angle	Voltage	Max Power	IP Options
RIB-RGB	RGB	N/A	5/10	30	SMD5050	2	120°	12	7.2 w/m	IP54, IP67, IP68
RIB-RGBW	RGB+W	3000k, 4000k	5/10	60	SMD5050	2	120°	24	12 w/m	IP54, IP67, IP68

LM (Lumen Management) 80



ACCESSORIES

Power supplies



LED/WIFI Controllers



Wifi + App
8 Zones



Tracks

Recessed Winged Track



Standard Track



45° Corner Track

